



- Surface-mounted LED weatherproof luminaire IP65 luminaire. Luminaire housing made of polycarbonate, with opal
- 16W, luminous flux 2200lm, fixture's efficacy of 138lm/w, CCT: 4000°K CRI>80.
- Ambient temperature -40 to +50 C. Safety class (EN 61140): II,
- Ingress protection IP65 / IK08 5 Joules (DIN EN 60529): impact resistance level in accordance with IEC 62262
- Average life span >50000 hours L70/B50 @ 25°C Ta.
- Osram,Epistar,Philips SMD2835 light source with low-voltage constant current driver, low power consumption efficiency non-dim
- Dimensions L1205 x W85 x H80 / LF: 810
- 5-Year warranty

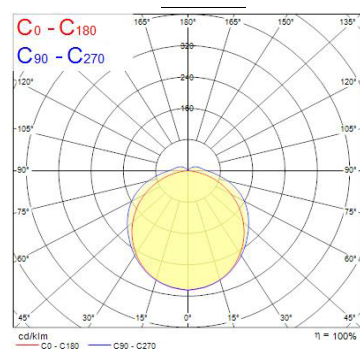

SLWP120.70149

,Epistar,Philips (based on availability)

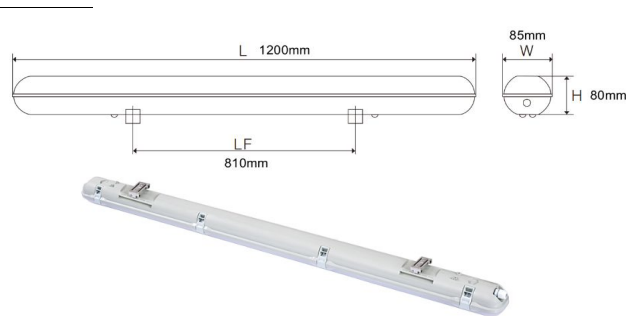

Images, line drawings and measurements illustrated may, in some cases be approximate and for guidance only. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed.
SmartLux Lighting are continually developing and improving its products. Technical specifications subject to change without prior notice.
For full terms and conditions visit: <https://www.smartlux.co/terms.htm>

SmartLux Lighting (Trading as a division of SmartLux Electric & Lighting Technology Ltd.)